


UES150-540277SPA1-OP

Features

- ◆ AC input voltage range 90-264VAC
- ◆ Protections against: short circuit/over current/over voltage
- ◆ Open frame style
- ◆ Meets 6KV surge immunity
- ◆ Energy efficiency level VI

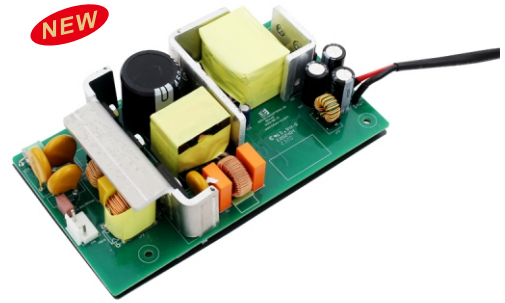

Input Voltage Range	90-264VAC	Operating Temperature	-5~45°C
Input Current	2A Max	Storage Temperature	-20~75°C
Average Efficiency	Energy efficiency level VI	Operating Humidity	5% to 90% non condensing
Output Voltage Tolerance	±5%	MTBF	200,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217
Standby Power	0.21W Max		
Safety Standard	Meet CQC(GB4943.1), cULus(UL62368-1), CE(EN62368-1)		
Weight	490g	Dimensions	144mm (L); 80mm (W); 33mm (H)
Applications	ITE		

Output data(UES150-540277SPA1-OP)



Model	Voltage (V)	Current (A)	Ripple (mV)	VI		Av. Eff. (%) Min
				115	230	
UES150-540277SPA1-OP	54.0	0.01-2.77	500	Y	Y	88.00

Standard

EMC standard	EN55032/CISPR32;EN55035/CISPR35
Conduction & Radiation	EN55032/CISPR32 Class A
Harmonic Currents	IEC/EN 61000-3-2 Class A
Voltage Flicker	IEC/EN 61000-3-3
ESD	IEC/EN 61000-4-2 ±8kV Air, ±6kV Contact Class B
Radiated Immunity	IEC/EN 61000-4-3 4V/m Class A
EFT/Burst	IEC/EN 61000-4-4 ±1kV Class B
Surge	IEC/EN 61000-4-5 ±6kV Diff.Mode,±6kV Common Mode
Conducted Immunity	IEC/EN 61000-4-6 4Vrms Class A
Dips & Interruptions	IEC/EN 61000-4-11 0%, 70%, 0% of UT