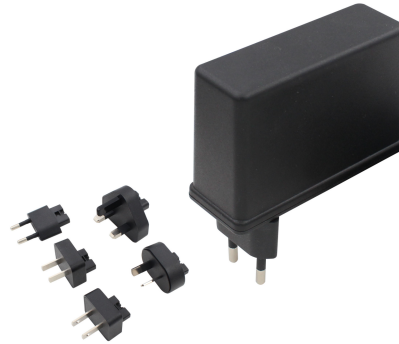




### Product Features

- Meets medical & I.T.E. safety
- 2 MOPP input to output isolation
- Touch current  $\leq 100\mu\text{A}$
- Energy efficiency level VI
- $\leq 0.075\text{W}$  standby power
- 5V-48V outputs, up to 36W
- Up to 5,000m operating altitude
- Interchangeable AC plugs








### Models & Parameters

Model Number	Voltage <sup>(*)</sup> (V)	Current (A)	Rated Power (max)	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay (@115V&230V)
UES36LCP1-XXXXYYSPA	5.0	0.01-6.00	30.00W	200mVpk-pk	$\pm 5\%$	Line: $\pm 1\%$ Load: $\pm 5\%$	85.00%	$\leq 3\text{s}$
	5.1	0.01-5.00	30.00W	200mVpk-pk	$\pm 5\%$		88.30%	$\leq 3\text{s}$
	7.5-14.0	0.01-4.00	36.00W	200mVpk-pk	$\pm 5\%$		88.30%	$\leq 3\text{s}$
	14.1-21.0	0.01-2.40	36.00W	200mVpk-pk	$\pm 5\%$		88.30%	$\leq 3\text{s}$
	21.1-30.3	0.01-1.63	36.00W	200mVpk-pk	$\pm 5\%$		88.30%	$\leq 3\text{s}$
	30.1-48.0	0.01-1.16	36.00W	200mVpk-pk	$\pm 5\%$		88.30%	$\leq 3\text{s}$

### Mechanical Details

Interchangeable AC Plug Options <sup>(\*)</sup>

DC cable and connector can be customized.

Unit: mm

Notes  
 (\*1, 2) Other options are available, please contact our sales representative for details.

**Input**

Input Voltage Range	80-264VAC
Frequency Range	47-63Hz
Input Current	1.0A at 80VAC
Inrush Current	70A max at 240VAC cold start
Touch Leakage Current <sup>(max)</sup>	≤100µA at 264VAC

**Environmental**

Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

**General**

Dimensions	90.5(L) 33.5(W) 58.5(H)mm
Weight	210g
MTBF	>100,000hrs MIL-HDBK-217 at 25°C

**Protection**

Overload	120-200% rated output power, auto recovery
Over Voltage	120-150% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

**Safety Approvals**

Safety Agency / Mark	Medical	ITE
CB	IEC60601-1/60601-1-11 ANSI/AAMI ES60601-1/60601-1-11	IEC62368-1
UL	CAN/CSA-C22.2 NO. 60601-1	UL62368
TüV SUD/Mark	EN60601-1/EN60601-1-11	-
TüV SUD/GS	-	EN62368-1
CE	-	EN62368-1
CCC	-	GB4943.1
PSE	-	J62368
KC	-	K60950-1
RCM	-	AS/NZS62368
FCC	-	FCC PART 15
PSB	-	IEC60950-1
BIS	-	IEC60950-1

**EMC**

Emission	Medical	ITE
Conduction	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR32
Radiation	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN60601-1-2	EN55024, CISPR 24
ESD	IEC61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	IEC61000-4-3	10V/m, 3V/m 80MHz - 2700MHz
EFT/Burst	IEC61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge <sup>(*)</sup>	IEC61000-4-5	±2KV line to line (different mode)
Conducted Immunity	IEC61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	IEC61000-4-8	30 A/m
Dips & Interruptions	IEC61000-4-11	0%, 70%, 0% of UT

**Others**

Dielectric Withstand Voltage	5,656VDC input to output
Insulation Resistance	10M Ohms, 500VDC input to output