

IP22 Class I & II (VI)

Product Features

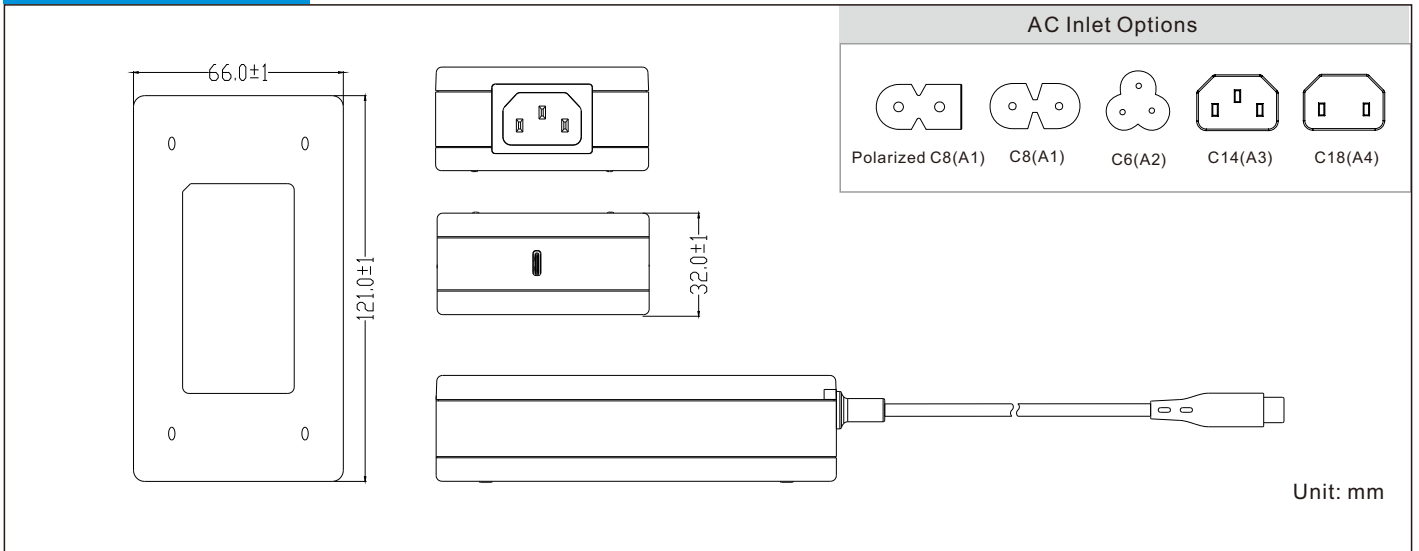
- Meets medical & I.T.E. safety
- 2 MOPP input to output isolation
- Leakage current $\leq 100\mu\text{A}$
- Energy efficiency level VI
- $\leq 0.15\text{W}$ standby power
- 5V/9V/12V/15V/20V/28V outputs, up to 140W
- Up to 5,000m operating altitude
- Meet USB PD3.1&PD3.0&QC4.0+&QC3.0&QC2.0 fast charge agreement
- GaN technology


Models & Parameters

Model Number	Voltage ^(*) (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES140AZ-SPC UES140BZ-SPC	5.0	0.01-3.00	15.00W	300mVpk-pk	$\pm 5\%$	Line: $\pm 1\%$ Load: $\pm 5\%$	82.0%	$\leq 3\text{s}$
	9.0	0.01-3.00	27.00W	300mVpk-pk	$\pm 5\%$		86.8%	$\leq 3\text{s}$
	12.0	0.01-3.00	36.00W	300mVpk-pk	$\pm 5\%$		87.5%	$\leq 3\text{s}$
	15.0	0.01-3.00	45.00W	300mVpk-pk	$\pm 5\%$		88.0%	$\leq 3\text{s}$
	20.0	0.01-5.00	100.00W	300mVpk-pk	$\pm 5\%$		90.0%	$\leq 3\text{s}$
	28.0	0.01-5.00	140.00W	300mVpk-pk	$\pm 5\%$		92.0%	$\leq 3\text{s}$

Model encoding:

 Replace "Z" with "1" for C8 (Class II), "2" for C6 (Class I), "3" for C14 (Class I), "4" for C18 (Class II) AC inlets
 UES140AZ-SPC with Output terminal Type-C, UES140BZ-SPC with DC cable

Mechanical Details


Notes

(*) Other options are available, please contact our sales representative for details.

Input

Input Voltage Range	80-264VAC
Frequency Range	47-63Hz
Input Current	2.5A at 90VAC
Touch Leakage Current ^(max)	≤ 100μA at 264VAC

Environmental

Operating Temperature	0°C to 40°C
Storage Temperature	-40°C to 80°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	121(L) 66(W) 32(H)mm
Weight	340g
MTBF	>100,000hrs MIL-HK8K-217 at 25°C

Protection

Overload	105-140% rated output power, auto recovery
Short Circuit	Trip and restart (hiccup mode)

Safety Meet

Safety Agency / Mark	Medical(meet)	ITE(meet)
CB	IEC60601-1/IEC60601-1-11	IEC60950-1 IEC62368-1
UL	ANSI/AAMI ES60601-1/60601-1-11 CAN/CSA-C22.2 NO. 60601-1	UL60950-1 UL62368-1 CAN/CSA C22.2 NO.60950-1
TüV-SUD/Mark	EN60601-1/60601-1-11	-
TüV-SUD/GS	-	IEC60950-1 IEC62368-1
RCM	-	AS/NZS 60950.1
CE	-	EN62368
CCC	-	GB4943.1
FCC	-	FCC PART 15

EMC

Emission	Medical	ITE
Conduction	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR 32
Radiation	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN60601-1-2	EN55035, CISPR 35
ESD	IEC61000-4-2 ±15KV air, ±8KV contact	
Radiated Immunity	IEC61000-4-3 3V/m 80MHz - 2.7GMHz	
EFT/Burst	IEC61000-4-4 ±2KV on AC port, ±1KV on signal ports	
Surge	IEC61000-4-5 ±1KV line to Neutral, ±1KV line/Neutral to GND	
Conducted Immunity	IEC61000-4-6 3Vrms, 6Vrms (0.15MHz-80MHz)	
Magnetic Field	IEC61000-4-8 30 A/m	
Dips & Interruptions	IEC61000-4-11 0%, 70%, 0% of UT	

Others

Dielectric Withstand Voltage	4000VAC input to output
Insulation Resistance	10M Ohms, 500VDC input to output